

DALLA TERRA TILE & STONE dallaterra.ca




FANOCI

COLOR Surface: Matt


Natural and so very real.

The luxury of natural stone with the durability of porcelain.


SIZES

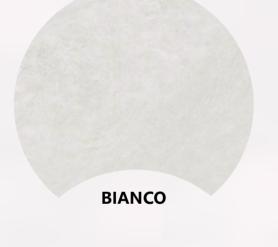



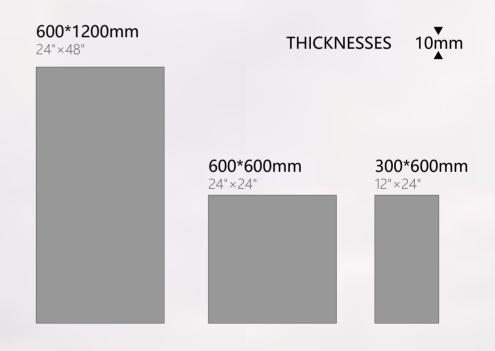



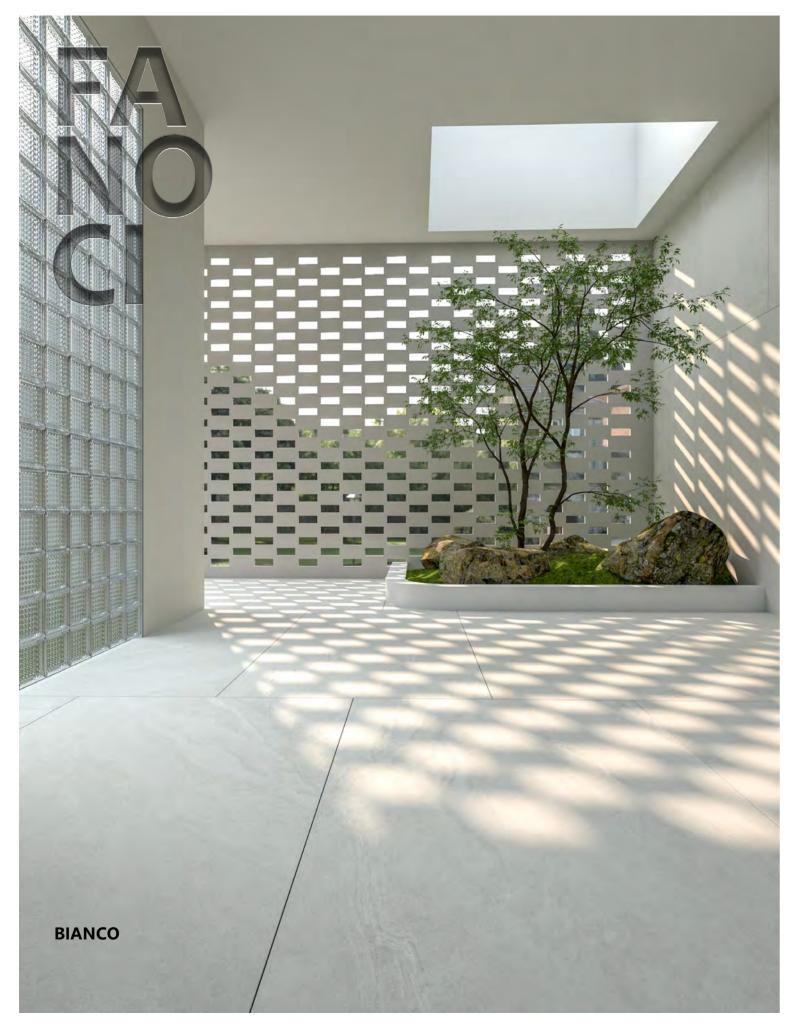


BIANCO

Beautiful veining, characterized by uneven chromatic surfaces, which makes the product soft, extremely elegant and works well with other types of materials, such as wood, metal and concrete.




SIZE


300*600mm 12"×24" 600*600mm 24"×24" 600*1200mm 24"×48"

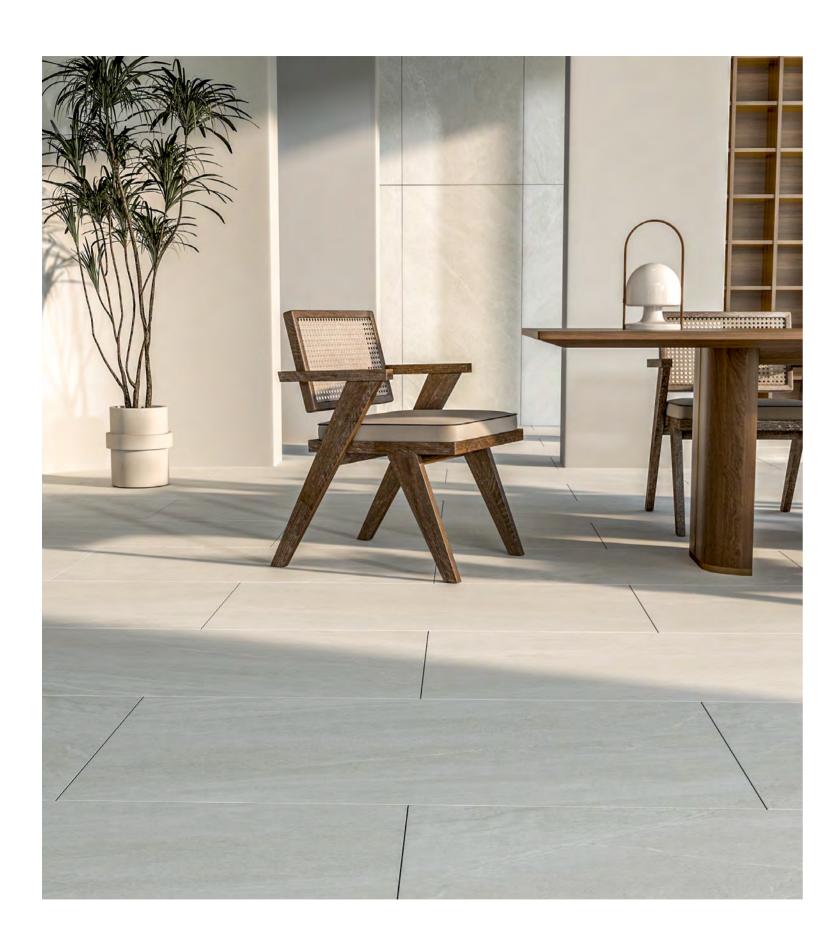

BIANCO 600*1200mm 24"×48"

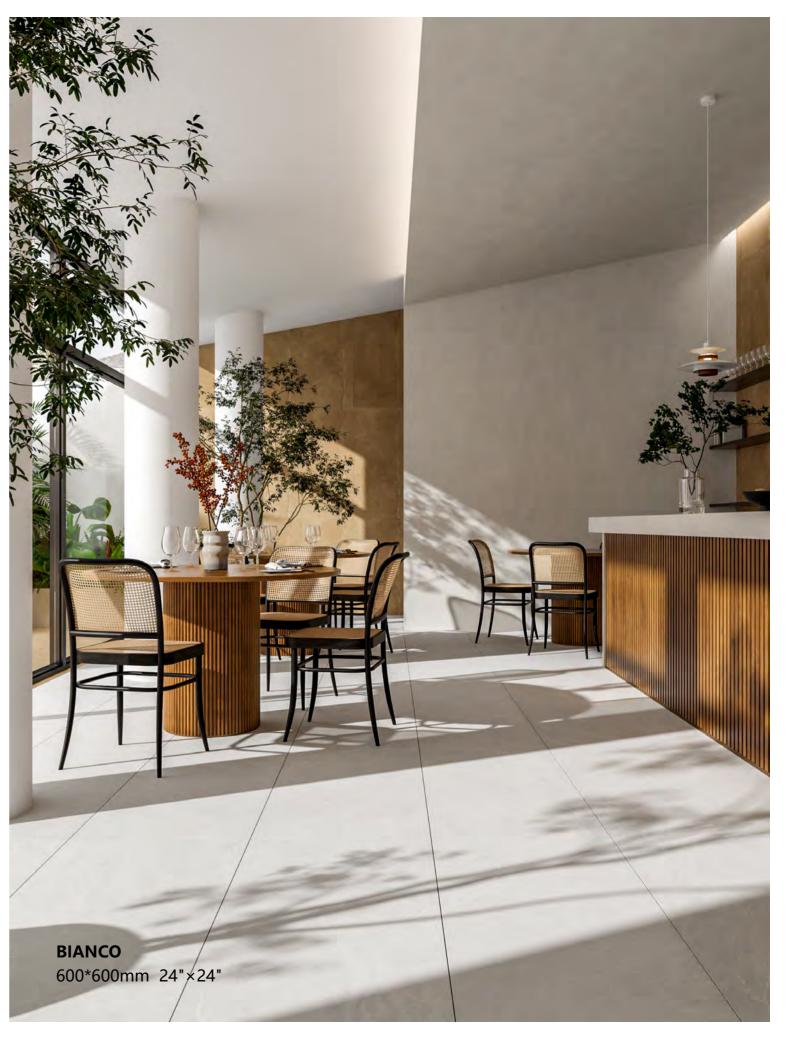

06

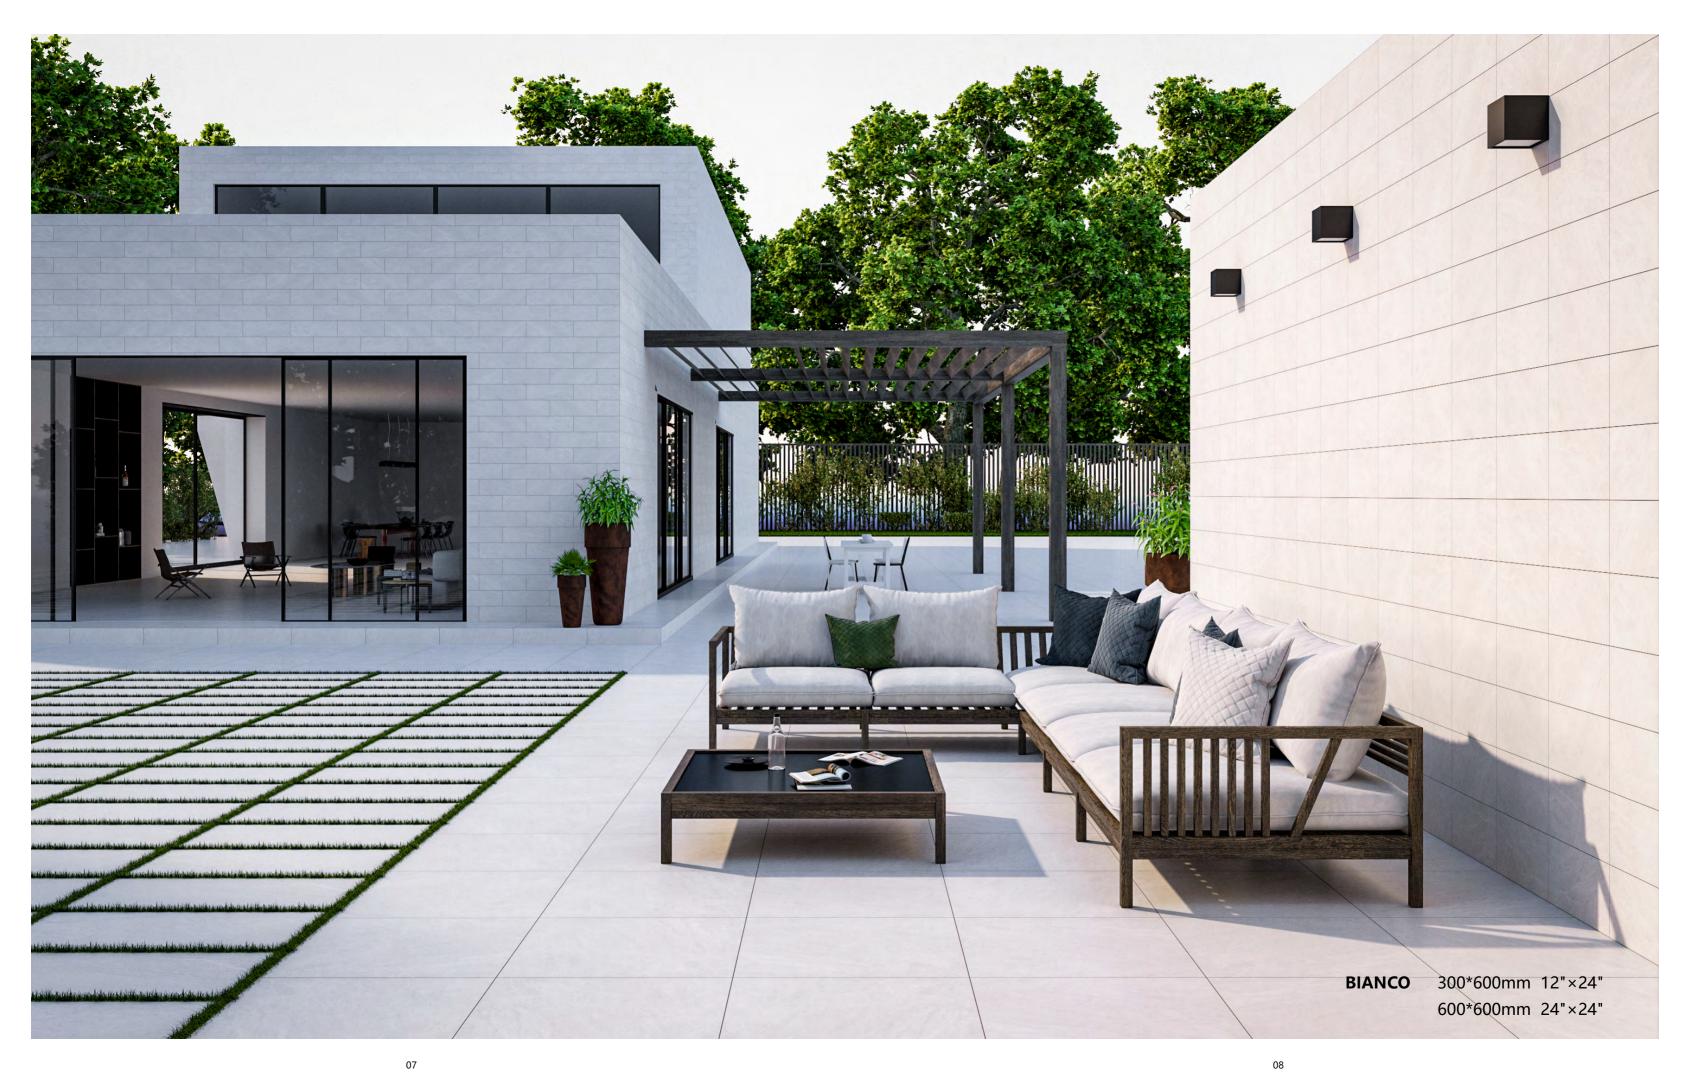

NERO

Stone is a universal language, capable of uniting the world's different cultures. It is precisely this extraordinary chromatic power that inspired to create this series.






300*600mm 12"×24" 600*600mm 24"×24" 600*1200mm 24"×48"



NERO

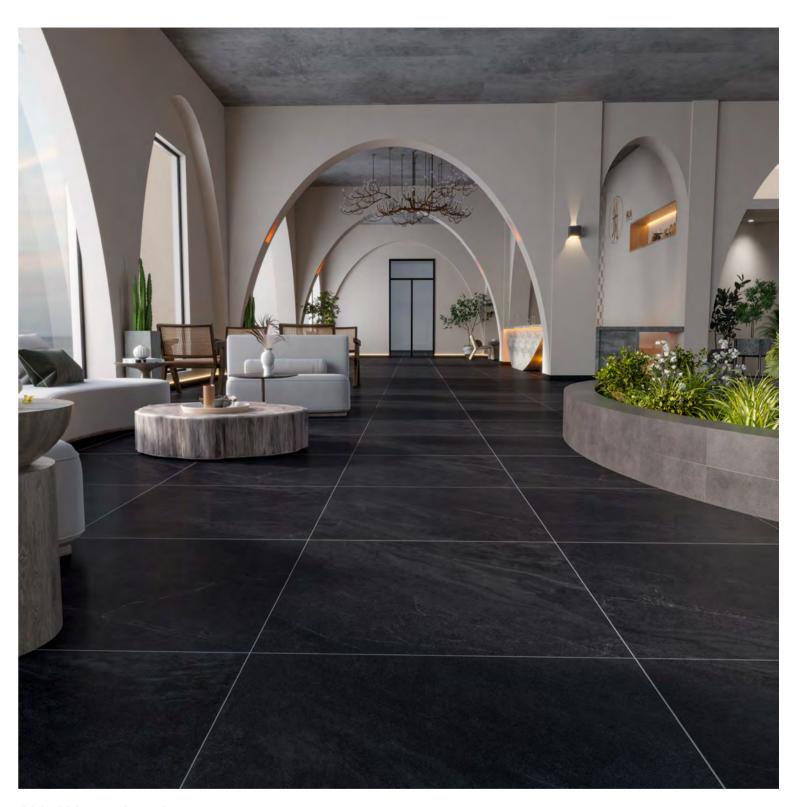

600*600mm 24"×24"



12

Technical Standard

TECHNICAL CHARACTERISTICS	STANDARD TEST METHOD	STANDARD PRESCRIBED VALUES	FIORE VALUES						
MEASUREMENT AND SURFACE APPEARANCE									
LENGTH	ISO 10545-2	±0.3%	-0.08~-0.05%						
WIDTH	ISO 10545-2	±0.3%	-0.08~-0.05%						
THICKNESS	ISO 10545-2	±5%	+0.1%~+2.1%						
FLATNESS	ISO 10545-2	±0.4%	-0.06%~+0.04%						
PHYSICAL PROPERTIES									
WATER ABSORPTION	ISO 10545-3	≤ 0.5%	≤ 0.5%						
BREAKING STRENGTH	ISO 10545-4	≥ 1300N	2120N						
MODULUS OF RUPTURE	ISO 10545-4	≥ 35N/mm²	46.3N/mm²						
RESISTANCE TO ABRASION	ISO 10545-7	-	CLASS 3						
THERMAL EXPANSION COEFFICIENT	ISO 10545-8	-	5.7×106°C -1						
THERMAL SHOCK RESISTANCE	ISO 10545-9	NO DEFECTS SHOULD BE VISIBLE	FULLY RESISTANCE						
FROST RESISTANCE	ISO 10545-12	"NO SURFACE DEFECTS OR CRACKS SHOULD BE VISIBLE"	FULLY RESISTANCE						
SLIP RESISTANCE	AS 4586-2013	R9-R13	≥ R9						
CHEMICAL PROPERTIES									
CHEMICAL RESISTANCE RESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING SALTS	ISO 10545-13	MINIMUN B	А						
RESISTANCE TO STAINING	ISO 10545-14	MINIMUN CLASS 3	CLASS 5						

Packing Details

COLLECTION	Sizes	Pcs/Ctn	M²/Ctn	Kgs/Ctn	Ctns/Plt	M²/Plt	Kg/Plt
FANOCI							
	60×120-24"×48"	2	1.44	34	60	80.64	2040
	60×60 -24"×24"	4	1.44	31	40	57.6	1240
	30×60 -12"×24"	8	1.44	30.5	40	57.6	1220

Shade variation	V1	Uniform appearance V1	Slight variation V2	Moderate variation V3	Substantial variation V4
-----------------	----	-----------------------	---------------------	-----------------------	--------------------------

14

13