

TIBUR

LIGHT
BIANCO



TIBUR


Tibur is a collection freely inspired by ageless Travertine stone, it brings simple and refined surface of the natural stone to underline the modernity of an exclusive elegance.



LIGHT



SIZE 300*600mm 12"×24"
600*600mm 24"×24"
600*1200mm 24"×48" (special order)
900*1800mm 36"×72" (special order)





LIGHT 300*600mm 12"×24"



LIGHT 600*1200mm 24"×48"




BIANCO

Timeless modern and harmonious elegance are expressed in our Tibur collection, designed with a combination of warm and cold veins.




SIZE 300*600mm 12"×24"
600*600mm 24"×24"
600*1200mm 24"×48" (special order)
900*1800mm 36"×72" (special order)





BIANCO 600*1200mm 24"×48"

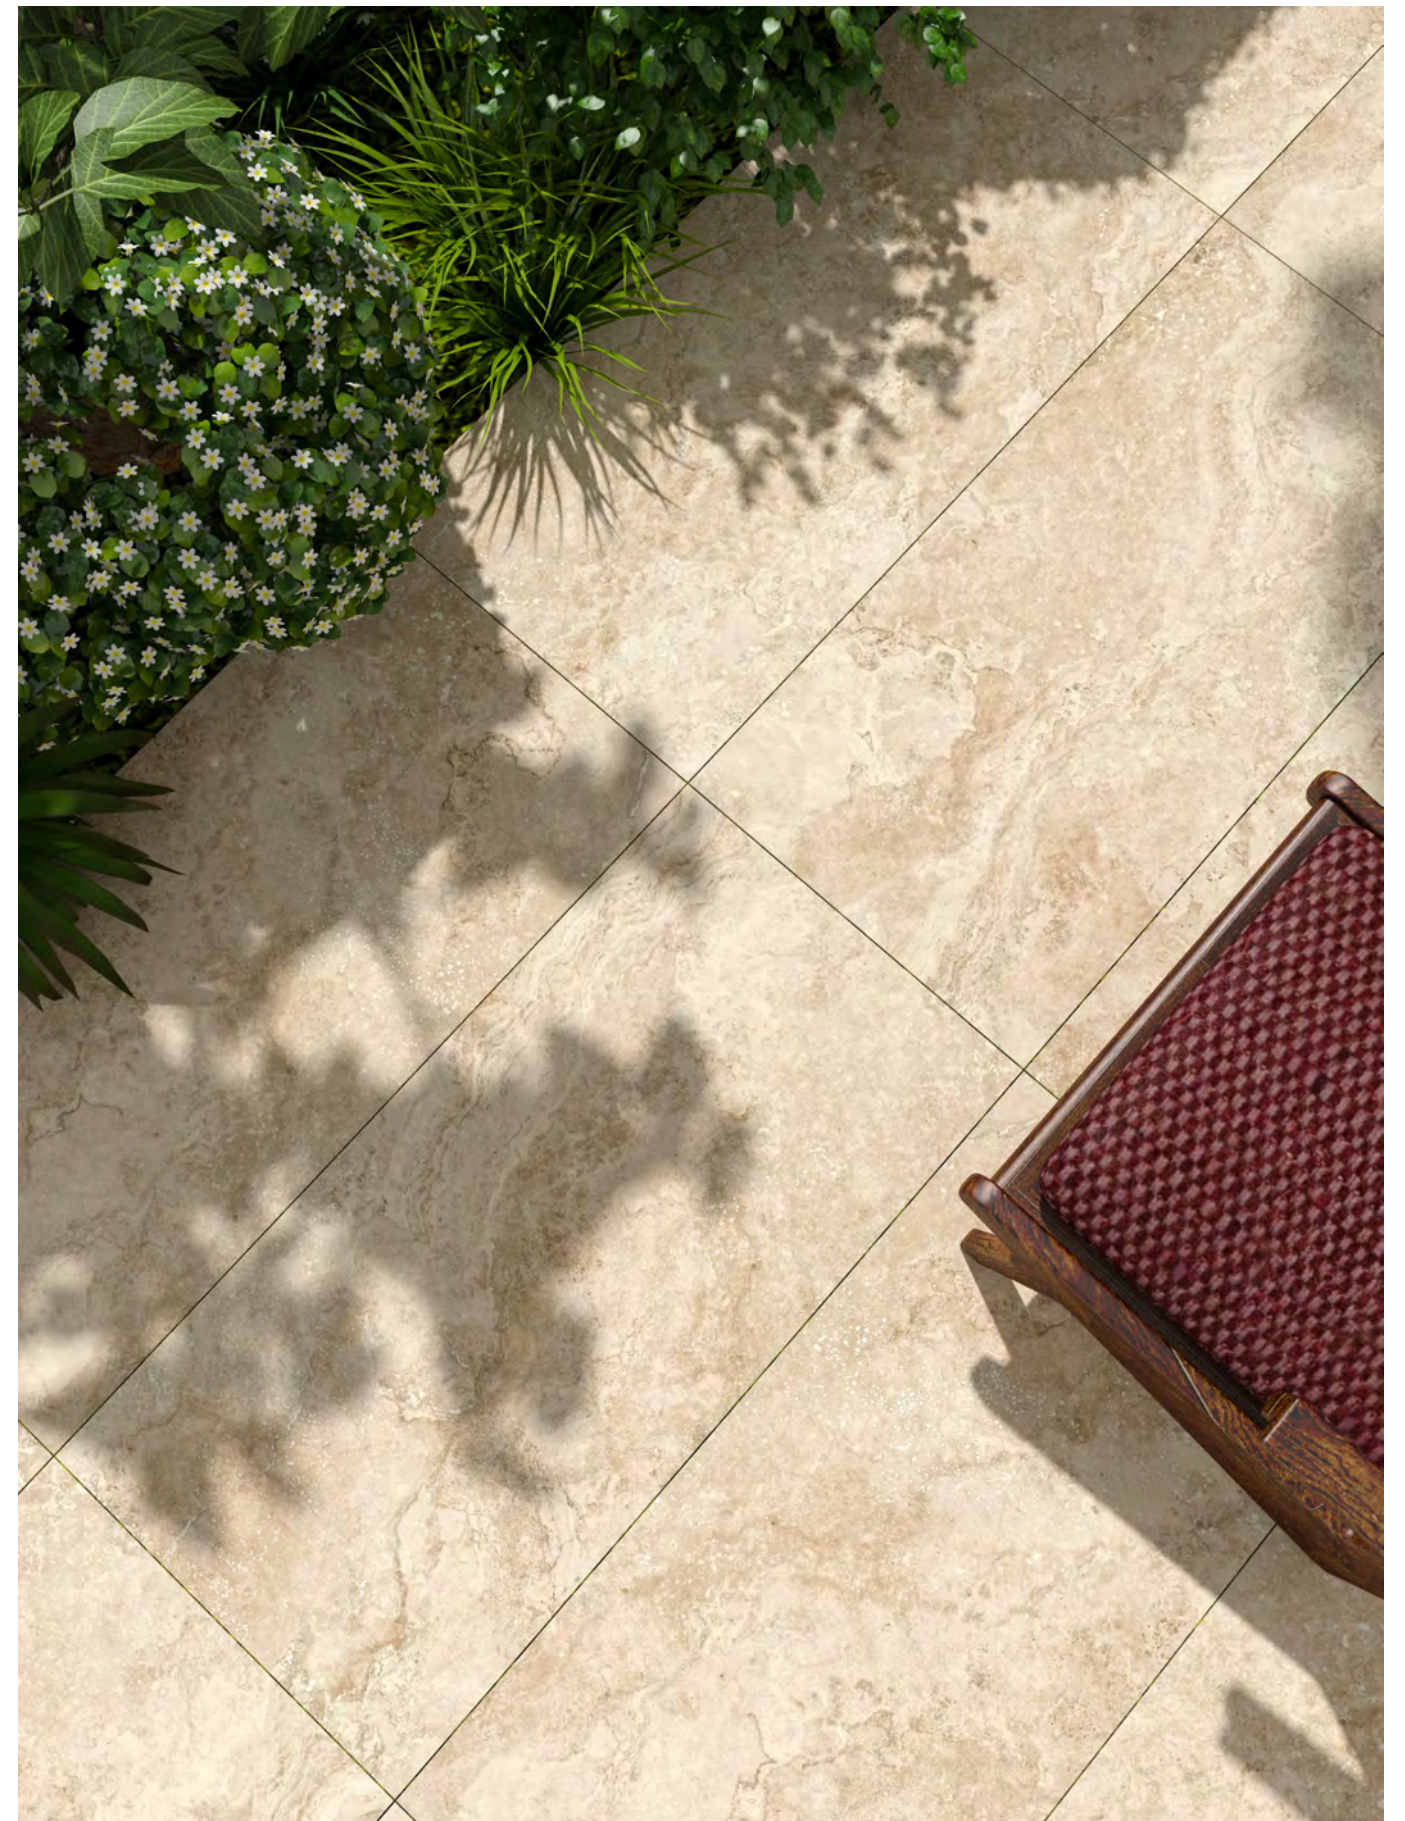



BIANCO 600*600mm 24"×24"



LIGHT



BIANCO



DALLA TERRA TILE & STONE
dallaterra.ca

Technical Standard

TECHNICAL CHARACTERISTICS	STANDARD TEST METHOD	STANDARD PRESCRIBED VALUES	FIORE VALUES
MEASUREMENT AND SURFACE APPEARANCE			
LENGTH	ISO 10545-2	±0.3%	-0.08~-0.05%
WIDTH	ISO 10545-2	±0.3%	-0.08~-0.05%
THICKNESS	ISO 10545-2	±5%	+0.1%~+2.1%
FLATNESS	ISO 10545-2	±0.4%	-0.06%~+0.04%
PHYSICAL PROPERTIES			
WATER ABSORPTION	ISO 10545-3	≤ 0.5%	≤ 0.5%
BREAKING STRENGTH	ISO 10545-4	≥ 1300N	2120N
MODULUS OF RUPTURE	ISO 10545-4	≥ 35N/mm²	46.3N/mm²
RESISTANCE TO ABRASION	ISO 10545-7	–	CLASS 3
THERMAL EXPANSION COEFFICIENT	ISO 10545-8	–	5.7×106°C -1
THERMAL SHOCK RESISTANCE	ISO 10545-9	NO DEFECTS SHOULD BE VISIBLE	FULLY RESISTANCE
FROST RESISTANCE	ISO 10545-12	"NO SURFACE DEFECTS OR CRACKS SHOULD BE VISIBLE"	FULLY RESISTANCE
SLIP RESISTANCE	AS 4586-2013	R9-R13	≥ R9
CHEMICAL PROPERTIES			
CHEMICAL RESISTANCE RESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING SALTS	ISO 10545-13	MINIMUN B	A
RESISTANCE TO STAINING	ISO 10545-14	MINIMUN CLASS 3	CLASS 5

Packing Details

COLLECTION	Sizes 	Pcs/Ctn 	M²/Ctn 	Kgs/Ctn 	Ctns/Plt 	M²/Plt 	Kg/Plt
TIBUR	90x180-36"x72"	2	3.24	90	31	100.44	2790
	60×120-24"×48"	2	1.44	34	60	80.64	2040
	60×60 -24"×24"	4	1.44	31	40	57.6	1240
	30×60 -12"×24"	8	1.44	30.5	40	57.6	1220
	30×30 -12"×12"	11	0.99	22	54	53.46	1188
SHADE VARIATION	V3	Uniform appearance V1	Slight variation V2	Moderate variation V3	Substantial variation V4		